


Liquid Tight Connector-Straight

Standard Material:

- Zinc Die Cast

Issued: Apr.25th,2025

Catalogue Number	Size	Dimensions in(inches)			
		A	B	C	D
		±0.005	±0.005	±0.005	±0.005
SLT-050I	1/2"	1.209	0.484	1.283	0.565
SLT-075I	3/4"	1.244	0.488	1.527	0.776
SLT-100I	1"	1.457	0.591	1.772	0.984

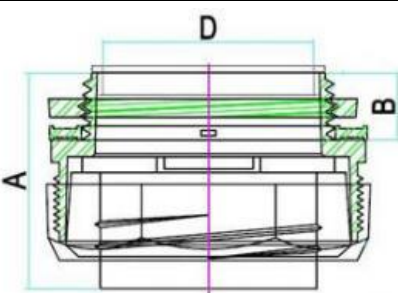



★ Consult Manufacturer for Proper Installation



USE: To terminate and seal liquidtight flexible metal conduit to an oiltight, liquidtight or rainlight box or enclosure. Connectors can be used with tapered thread female entry of unthreaded